




SPB Stainless Steel Submersible Sewage Pump



Application

Wastewater drainage in factories, construction sites and commercial facilities
 Drainage system in municipal sewage treatment plants
 Drainage station in residential quarters
 Municipal projects
 Methane pools and field irrigation in countryside

Performance Curves

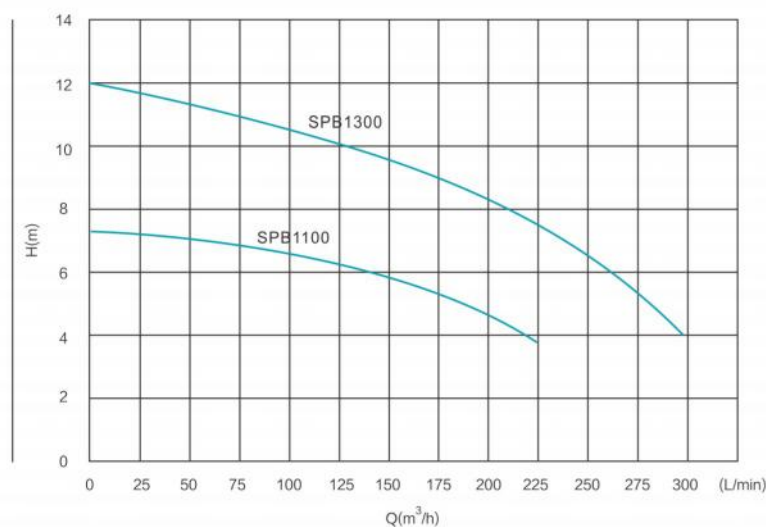

Motor

Copper winding
 Insulation class: F
 Protection level: IP68

Pump

Max. immersion depth: 5m
 Max. liquid temperature: +40°C
 Liquid pH value: 5-9
 Max. liquid density: $1.2 \times 10^3 \text{ kg/m}^3$

Performance Table

Model	Power		Pipe inch	Max flow L/min	Max head m	Dim mm	G.W kg
	Kw	Hp					
SPB1100	1.1	1.5	2"	233	7	270×220×550	24
SPB1300	1.3	1.7	2"	300	12	300×240×560	25